SYM	QTY	Botanical name	COMMON NAME	HT./SPREAD	CALIPER	ROOT	N B
DECID	UOUS	SHADE TREES AND ORNAMENTAL TREES					1
AR	4	Acer rubrum 'October Glory'	October Glory Red Maple	14'-16' HT.	$2\frac{1}{2}$ " - 3" cal.	B&B	Γ
BN	2	Betula nigra 'Heritage'	Heritage River Birch	10-12' HT.	-	B&B	
LI	2	Liquidambar styraciflua 'Rotundiloba'	Sweet Gum	14'-16' HT.	2 ½" - 3" cal.	B&B	
NS	2	Nyssa sylvatica 'Wildfire'	Wildfire Black Gum	12'-14' HT.	$2\frac{1}{2}$ " - 3" cal.	B&B	
EVERC	Green t	REES					
ТО	8	Thuja occidentalis 'Nigra'	Dark American Arborvitae	6'-7' HT.	—	B&B	\square
SHRU	BS						-
IG	13	Ilex glabra 'Shamrock'	Shamrock Inkberry Holly (dwarf)	24-30" HT.		B&B	\square
MP	7	Myrica pensylvanica	Northern Bayberry	3'-4' HT.	——	B&B	-
PF	24	Potentilla fruticosa 'Goldfinger'	Goldfinger Shrubby Cinquefoil	18"-24" HT.	——	Cont.	
VD	8	Viburnum dentatum 'Blue Muffin'	Blue Muffin Arrowwood Viburnum	3'-4' HT.		B&B	
PEREN	NIALS,	ORNAMENTAL GRASSES & GROUNDCOVE	R		-		
ES	56	Eragrostis spectabilis	Purple Lovegrass			Cont.	
JC	37	Juniperus communis var. depressa 'AmiDak'	Blueberry Delight Common Juniper			Cont.	
RF	22	Rudbeckia fulgida 'Goldsturm'	Goldsturm Black-Eyed Susan			Cont.	
SA	38	Sisyrinchium angustifolium 'Lucerne'	Lucerne Blue-Eyed Grass			Cont.	
RAIN	GARDEN	N PLANTING			_		
AT	14	Asclepias tuberosa	Butterfly Milkweed		— —	Cont.	\vdash
ET	18	Eutrochium dubium 'Little Joe'	Dwarf Joe Pye Weed			Cont.	
LS	19	Liatris spicata	Blazing Star			Cont.	
PV	12	Panicum virgatum 'Shenandoah'	Shenandoah Switchgrass			Cont.	
SS	15	Solidago sempervirens	Seaside Goldenrod			Cont.	
BUFFE	R RESTO	DRATION PLANTING					
	1	Aronia melanocarpa	Black Chokeberry	18"-24" HT.	<u> </u>	Cont.	\top
AM	10	Alonia melanocalpa	Black chokeben	10 - 111		00110	
AM CA	10	Clethra alnifolia	Summersweet Clethra	18"-24" HT.		Cont.	<u> </u>

PLANTING NOTES:

LOCATE AND VERIFY ALL EXISTING UTILITY LINES PRIOR TO PLANTING AND REPORT ANY CONFLICTS TO THE OWNER'S REPRESENTATIVE. ALL NEW PLANT MATERIAL SHALL CONFORM TO THE MINIMUM GUIDELINES ESTABLISHED FOR NURSERY STOCK PUBLISHED BY THE AMERICAN ASSOCIATION OF NURSERYMEN. IN ADDITION, ALL NEW PLANT MATERIAL FOR THE PROJECT SHALL BE OF SPECIMEN QUALITY.

ALL NEW WOODY STEM PLANTS SHALL BE BALLED AND BURLAPPED OR CONTAINER GROWN, UNLESS OTHERWISE NOTED ON THE PLANS. THE CONTRACTOR SHALL SUPPLY ALL NEW PLANT MATERIAL IN QUANTITIES SUFFICIENT TO COMPLETE THE PLANTING SHOWN ON THE PLANS. IF MINOR DISCREPANCIES EXIST BETWEEN THE NUMBER OF PLANTS DRAWN ON THE PLANTING PLAN AND THE NUMBER OF PLANTS IN THE PLANT LIST, THE PLANTING PLAN SHALL GOVERN.

NO PLANT MATERIAL SHALL BE PLANTED BEFORE ACCEPTANCE OF ROUGH GRADING. PLANTS SHALL BEAR SAME RELATIONSHIP TO NEW FINISHED GRADE AS THEY BORE TO FINISHED GRADE BEFORE BEING DUG IN THE NURSERY. PRIOR TO PLANTING, REMOVE THE TOP OF THE BURLAP AND CONFIRM THAT PLANT ROOT CROWNS ARE NOT COVERED BY SOIL FROM THE NURSERY.


STAKE LOCATION OF ALL PROPOSED PLANTING FOR APPROVAL BY THE OWNER'S REPRESENTATIVE PRIOR TO COMMENCEMENT OF PLANTING.


ALL NEW PLANT MATERIAL SHALL BE GUARANTEED BY THE CONTRACTOR FOR ONE YEAR FROM TIME OF WRITTEN ACCEPTANCE OF THE PROJECT

ALL AREAS DISTURBED BY CONSTRUCTION OPERATIONS INSIDE AND OUTSIDE THE LIMIT OF WORK SHALL BE LOAMED AND SEEDED AS SPECIFIED, UNLESS OTHERWISE REQUIRED BY THE OWNER'S REPRESENTATIVE.

- ALL AREAS TO BE SEEDED SHALL RECEIVE SOIL PREPARATION PRIOR TO SEEDING AS SPECIFIED, UNLESS OTHERWISE NOTED ON THE PLAN. 10. STOCKPILED ONSITE SOIL MAY BE REUSED FOR SEEDING AND PLANTING LOAM AFTER IT HAS BEEN TESTED FOR CONFORMANCE TO THE
- SOIL PREPARATION SPECIFICATION AND AMENDED ACCORDING TO THE APPROVED TEST REPORT AND THE APPROVED SOIL SUBMITTAL. 11. SEED MIXES - GENERAL INFORMATION (SEE SPECIFICATIONS FOR DETAILS):
- MEADOW SEEDING SEED MIX SHALL BE "NEW ENGLAND SHOWY WILDFLOWER MIX" AS SUPPLIED BY NEW
- ENGLAND WETLAND PLANTS, INC. OR APPROVED EQUAL. CONSERVATION SEEDING - SEED MIX SHALL BE "NEW ENGLAND CONSERVATION/WILDLIFE MIX" AS SUPPLIED BY NEW ENGLAND WETLAND PLANTS, INC. OR APPROVED EQUAL.
- RAIN GARDEN SEEDING SEED MIX SHALL BE A CUSTOM BLEND OF RIVERBANK WILD RYE, BLUE VERVAIN, NODDING BUR MARIGOLD, HOLLOW-STEM JOE PYE WEED, BONESET, NEW ENGLAND ASTER, WOOL GRASS, AND SOFT RUSH.

LANDSCAPE LEGEND						
SYMBOL	DESCRIPTION	REF.				
	METAL BENCH	1 L 2.1				
	SALVAGED GRANITE BENCH	3 L 2.1				
	ADA TABLE	2 L 2.1				
	BICYCLE PARKING	4 L 2.1				
·	PROPOSED DECIDUOUS SHADE TREE	1,2 L 2.2				
**	PROPOSED ORNAMENTAL TREE	1,2 L 2.2				
\bigcirc	PROPOSED EVERGREEN TREE	4 L 2.2				
(+) (+) (+)	PROPOSED SHRUBS & ORNAMENTAL GRASSES	3 L 2.2				
	PROPOSED PERENNIALS, ORNAMENTAL GRASSES AND GROUNDCOVER	5 L 2.2				
	MEADOW SEEDING	6 L 2.2				
5 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	RAIN GARDEN SEEDING	6 L 2.2				
	CONSERVATION SEEDING	6 L 2.2				

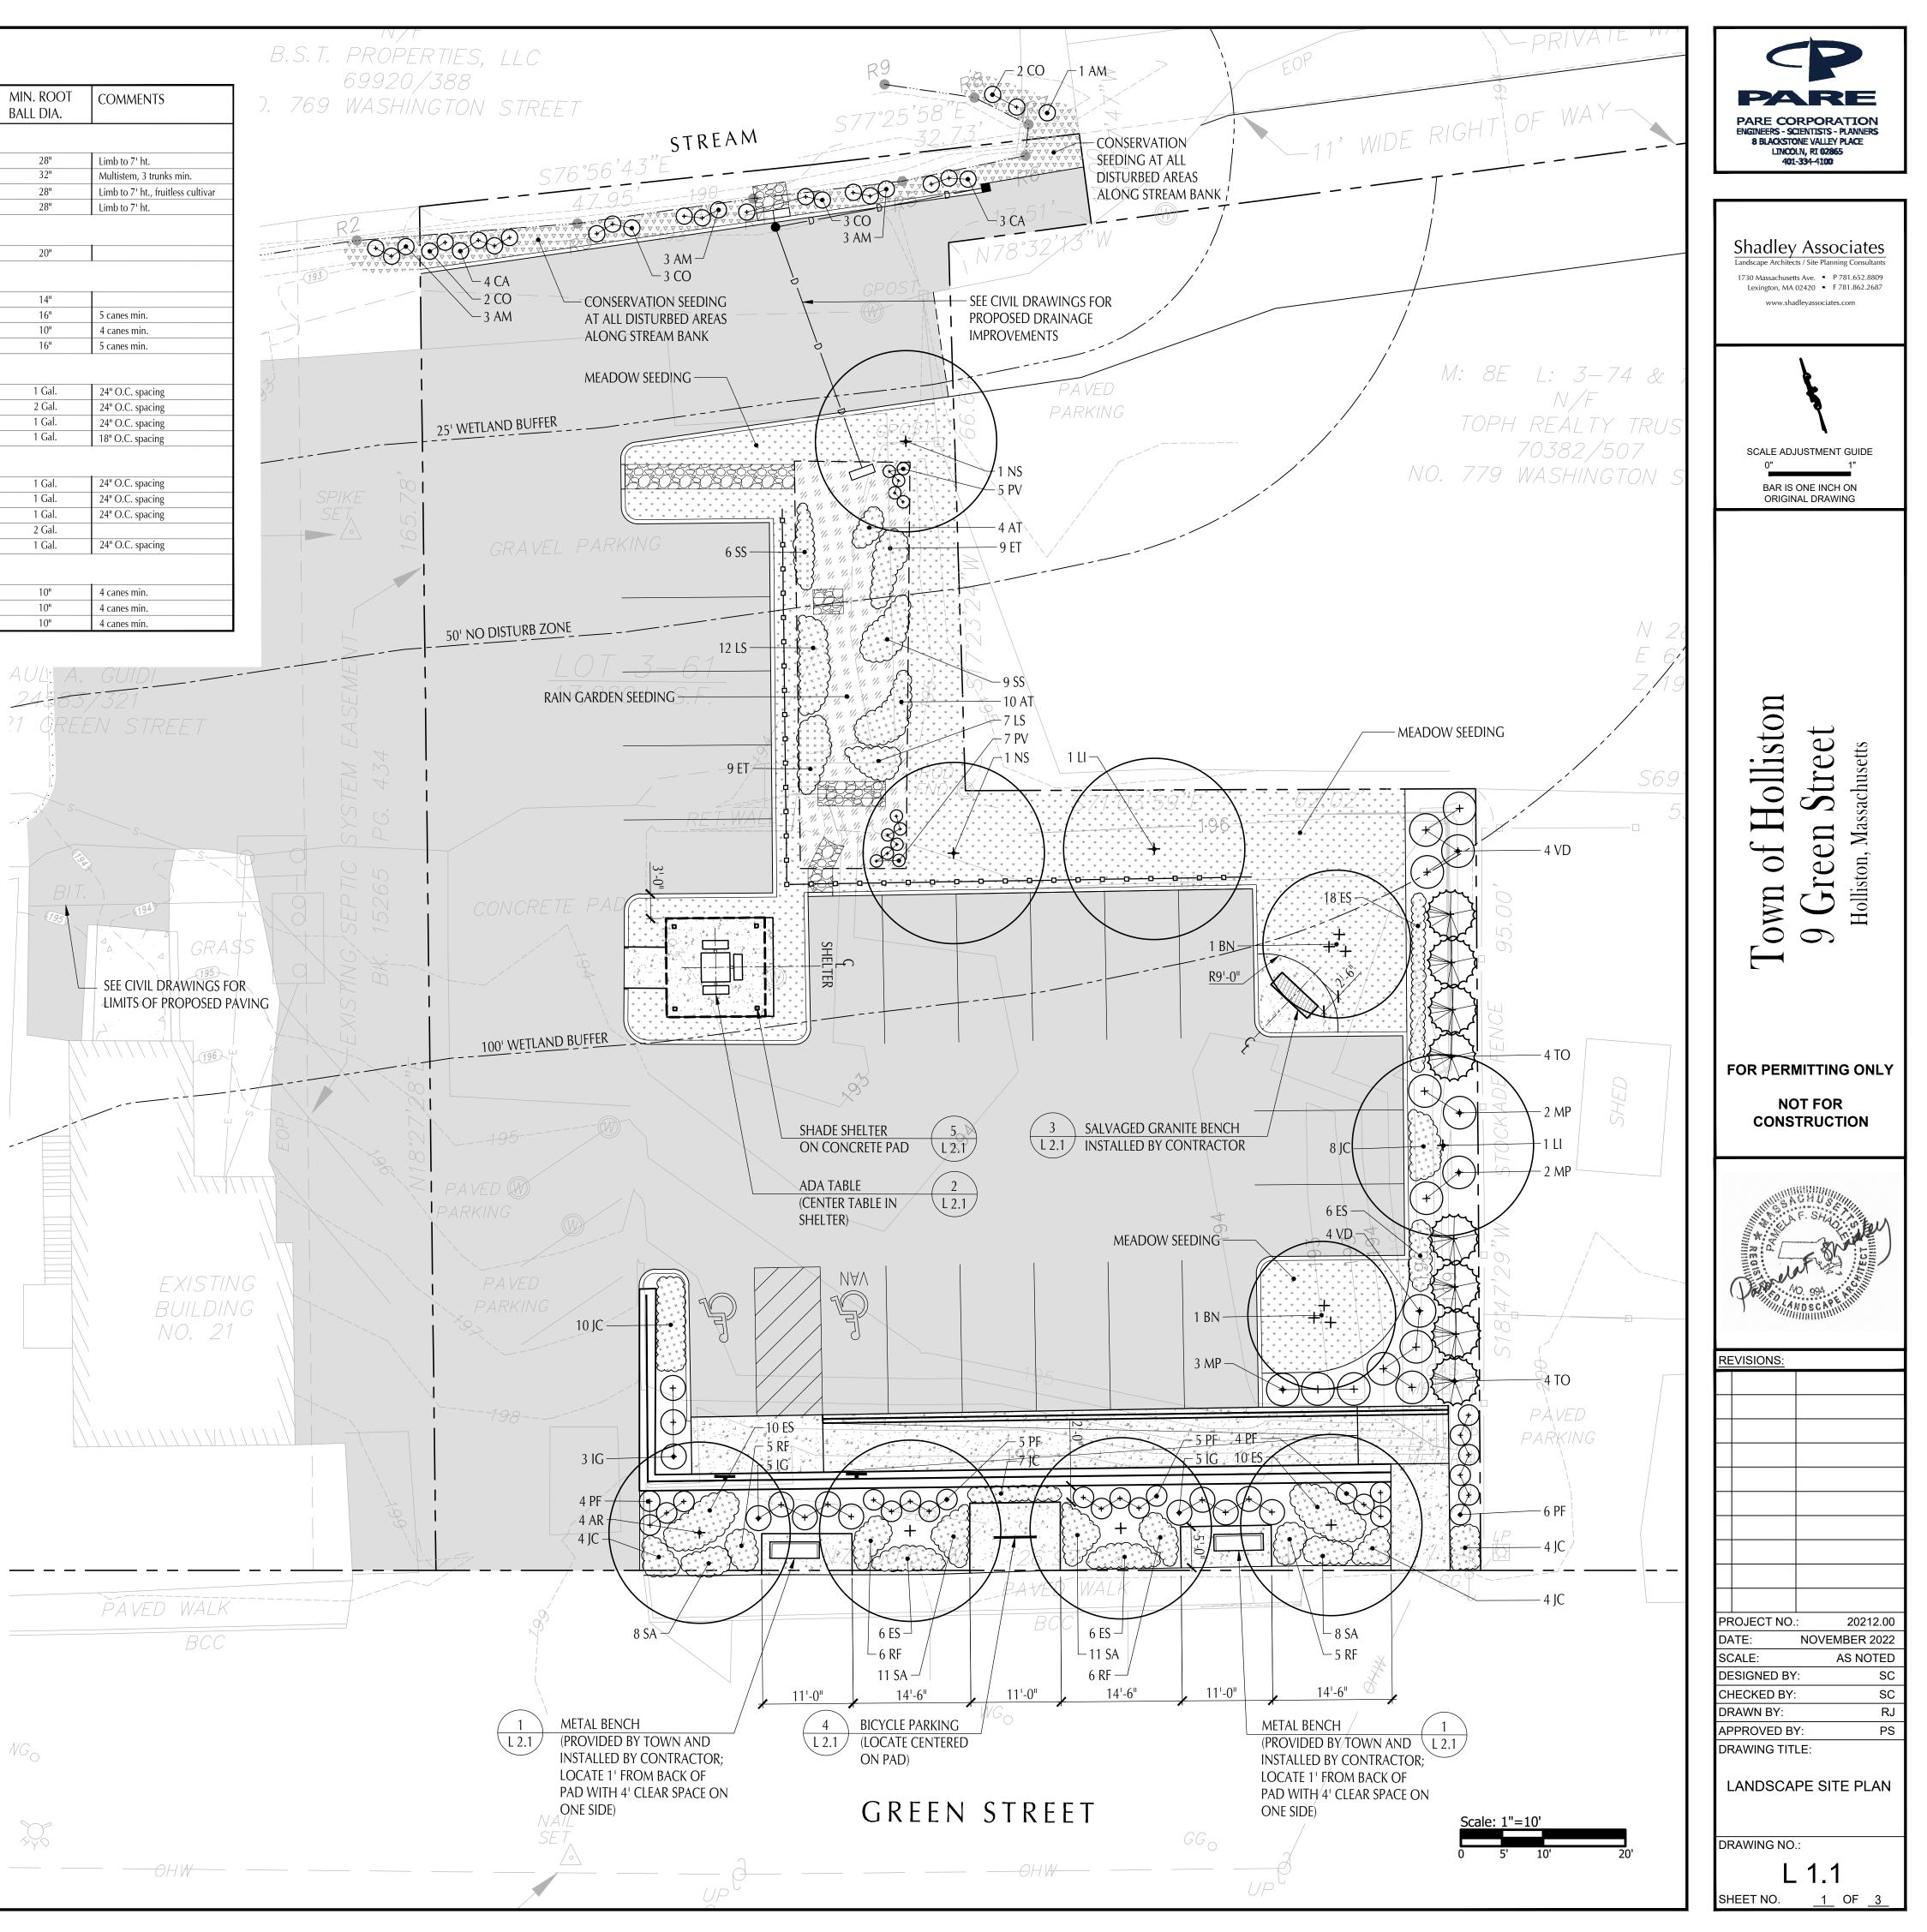


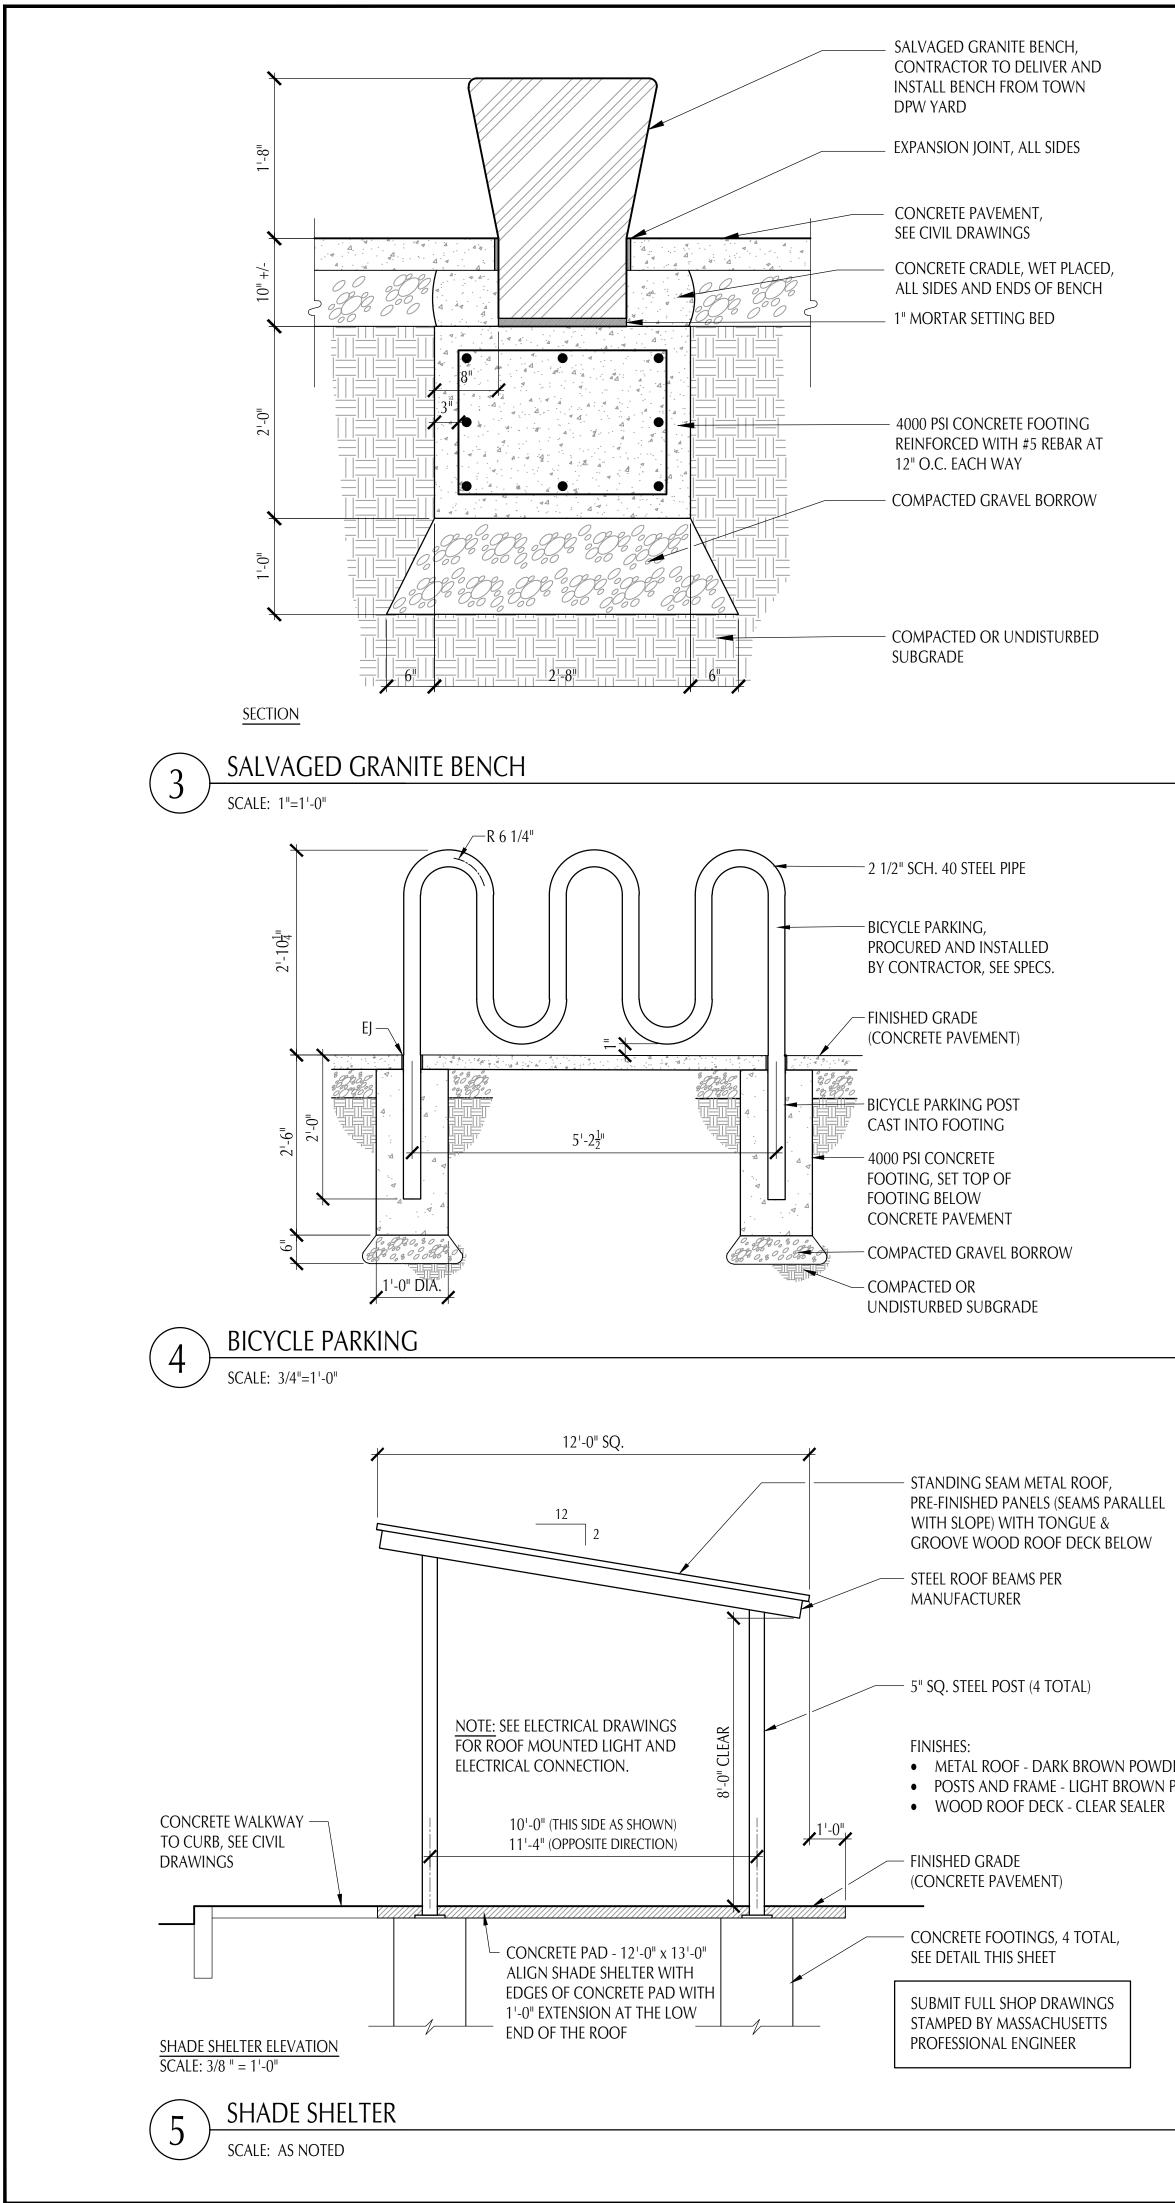


NOTE: SALVAGED GRANITE BENCH IS APPROXIMATELY 6' LONG X 2' WIDE X 1'-8" TALL WHEN INSTALLED. CONTRACTOR TO VERIFY DIMENSIONS.





PHOTO OF SALVAGED GRANITE BENCH

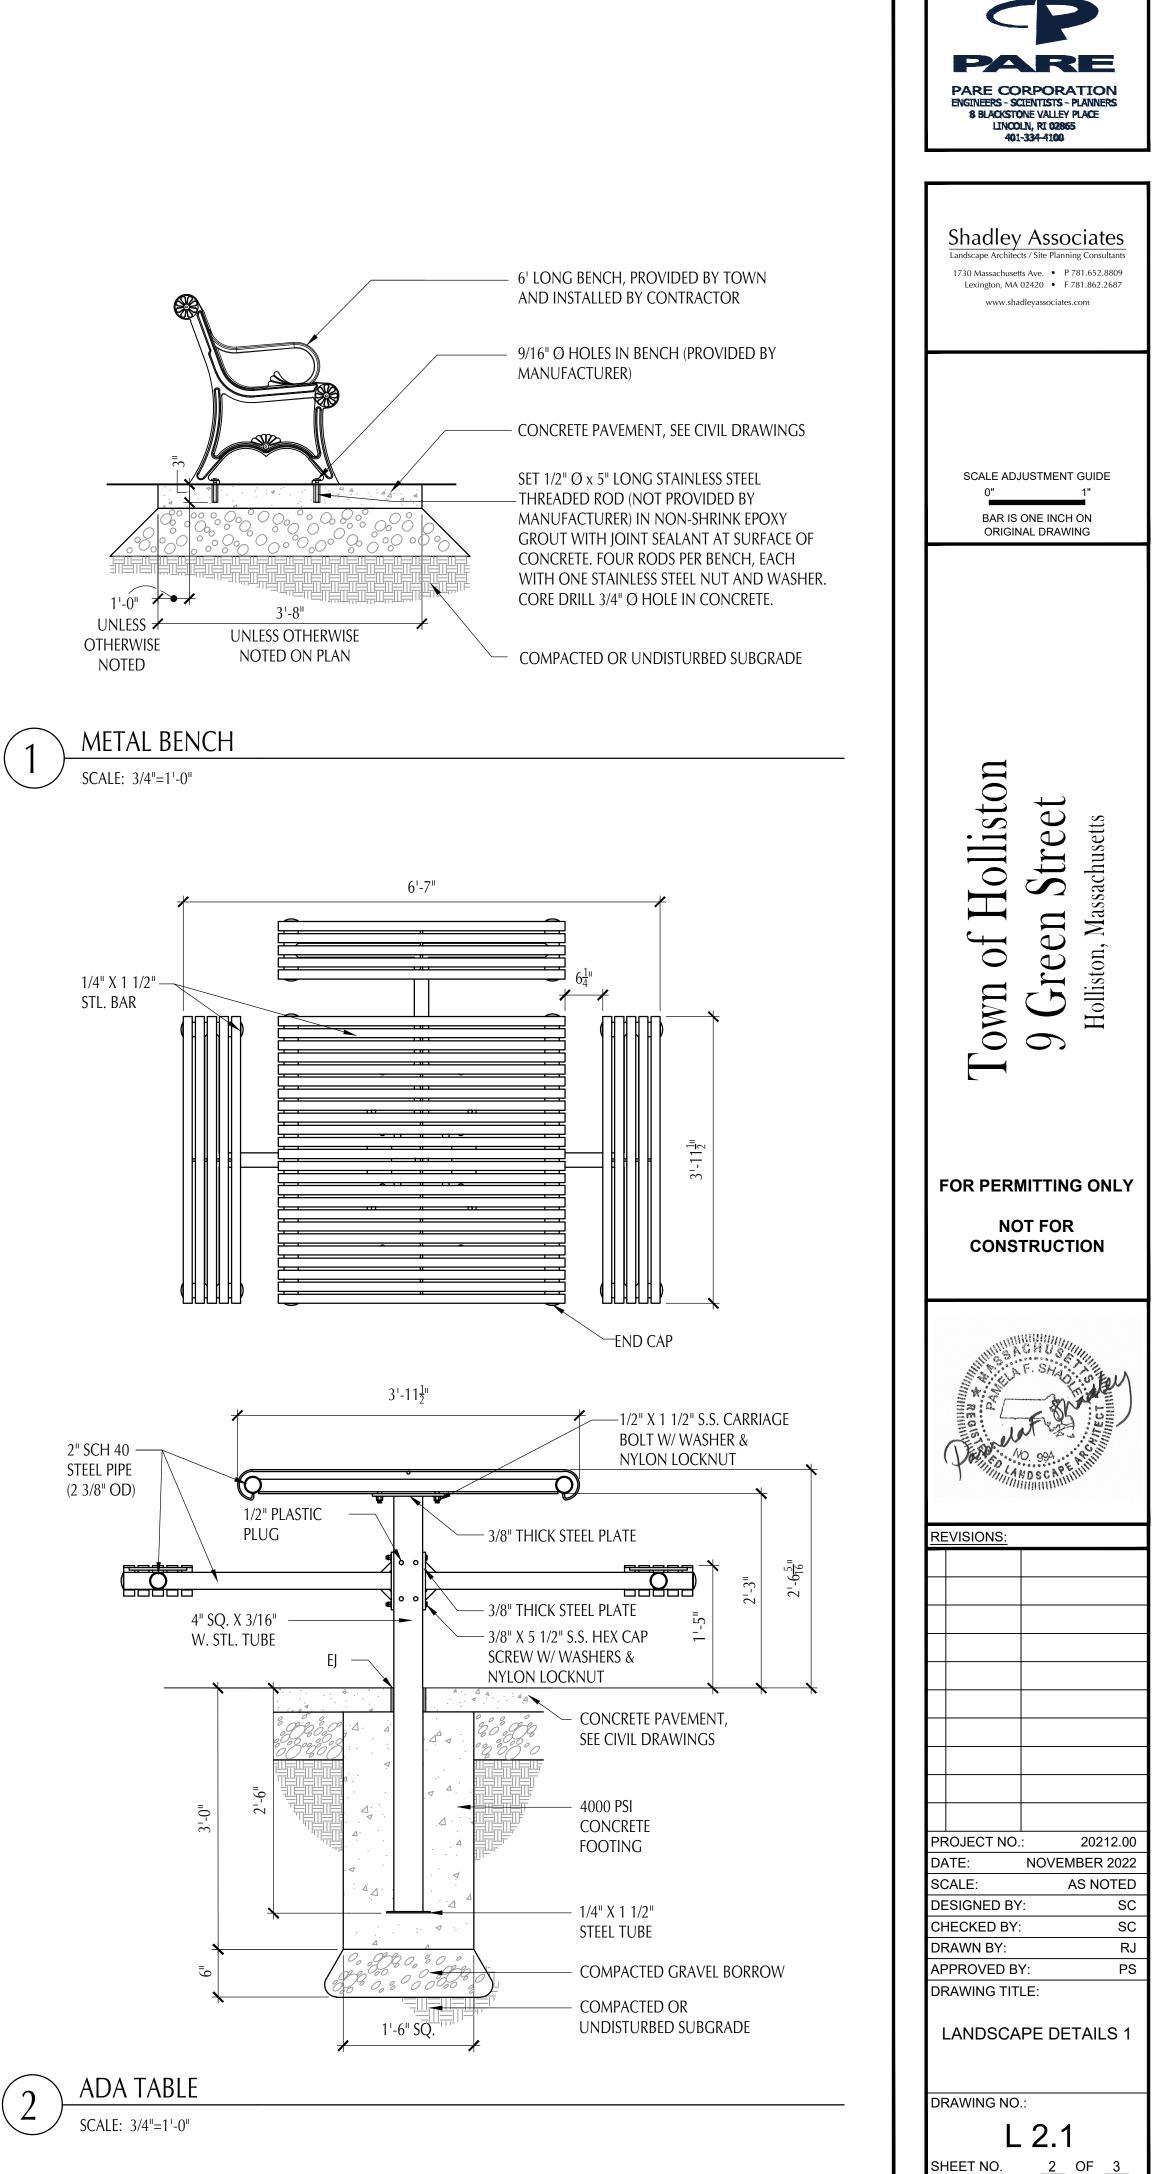

 METAL ROOF - DARK BROWN POWDERCOAT POSTS AND FRAME - LIGHT BROWN POWDERCOAT

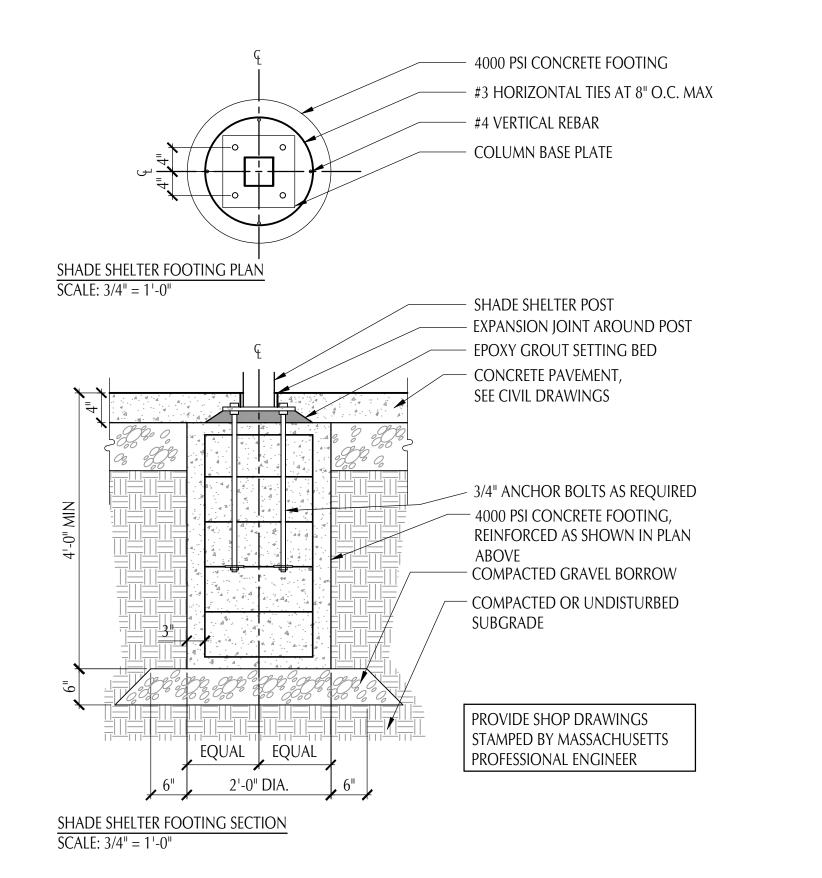

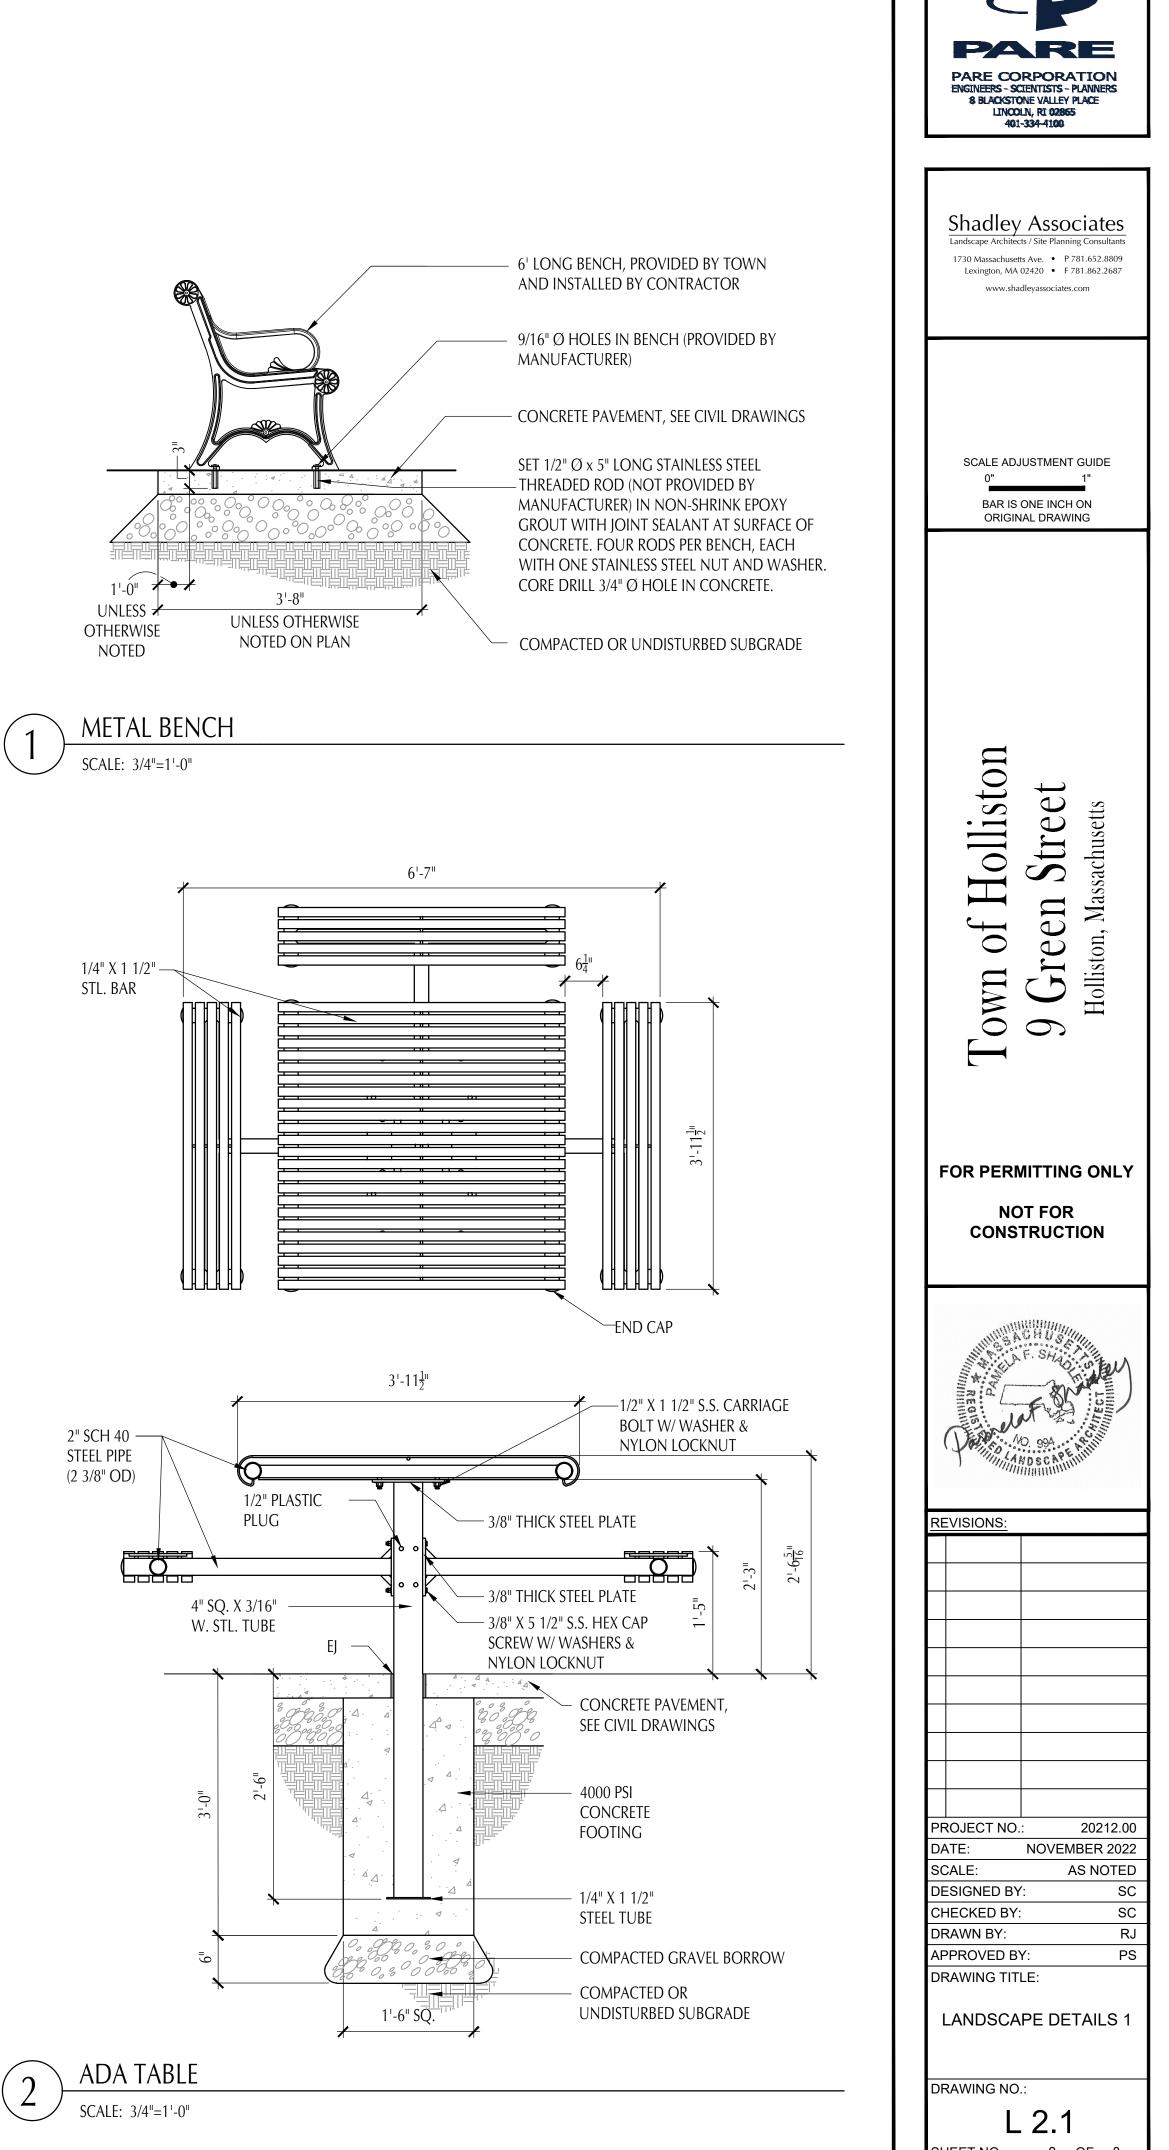

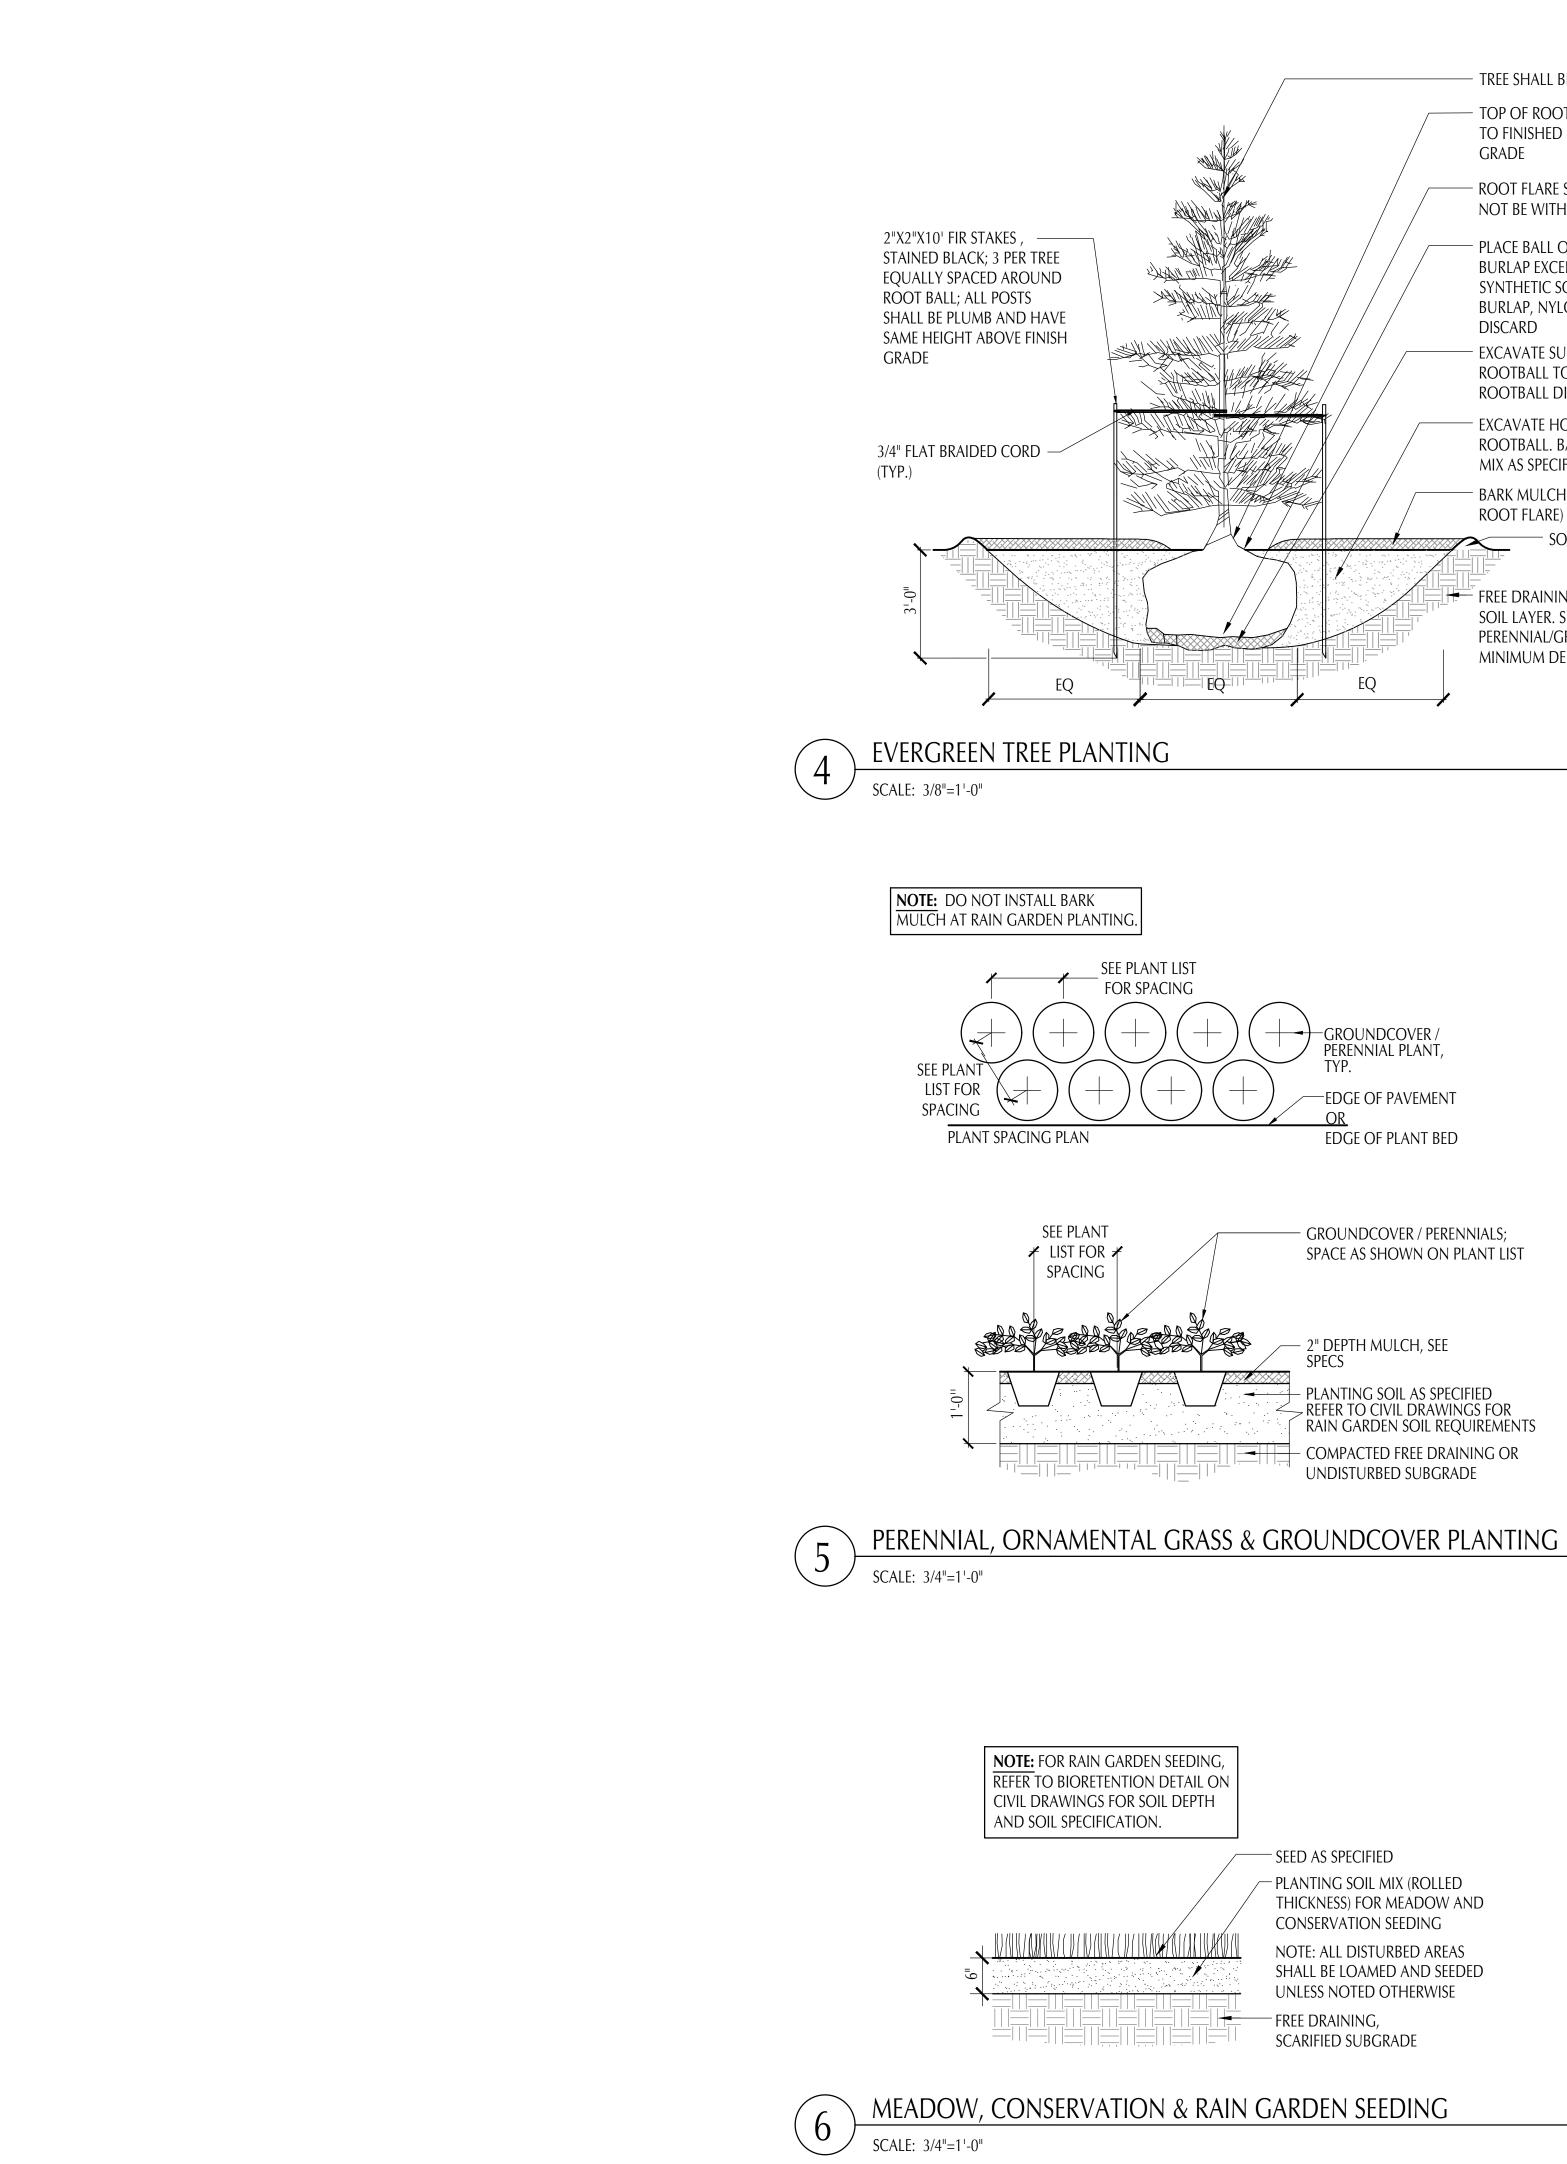

3/4" FLAT BRAIDED CORD (TYP.) -2:1 MAX SLOPE **GROUNDCOVER / PERENNIALS;** SPACE AS SHOWN ON PLANT LIST - PLANTING SOIL AS SPECIFIED - REFER TO CIVIL DRAWINGS FOR RAIN GARDEN SOIL REQUIREMENTS COMPACTED FREE DRAINING OR UNDISTURBED SUBGRADE SCALE: 3/8"=1'-0" THICKNESS) FOR MEADOW AND SHALL BE LOAMED AND SEEDED

TREE SHALL BE PLUMB AFTER SETTLEMENT

TOP OF ROOTBALL SHALL BEAR SAME RELATIONSHIP TO FINISHED GRADE AS TO PREVIOUS EXISTING GRADE

ROOT FLARE SHALL BE EXPOSED; MULCH SHOULD NOT BE WITHIN 4" OF TREE TRUNK

- PLACE BALL ON SUBGRADE. REMOVE AND DISCARD BURLAP EXCEPT UNDER BALL. REMOVE ALL SYNTHETIC SOIL WRAPPING MATERIALS (TREATED BURLAP, NYLON TWINE, WIRE BASKETS, ETC.) AND DISCARD

EXCAVATE SUBSOIL AS REQUIRED TO PLACE ROOTBALL TO PROPER ELEVATION. PLACE ROOTBALL DIRECTLY ON SUBSOIL

EXCAVATE HOLE TO DIAMETER 3X WIDER THAN ROOTBALL. BACKFILL HOLE WITH PLANTING SOIL MIX AS SPECIFIED

BARK MULCH, AS SPECIFIED, (HOLD MULCH OFF ROOT FLARE)

FREE DRAINING GRAVEL BORROW OR PROTECTIVE SOIL LAYER. SEE SEEDED LAWN OR PERENNIAL/GROUNDCOVER PLANTING DETAIL FOR MINIMUM DEPTHS.

TRUNK AT 2ND LOWEST BRANCH. FOLLOWING SPRING.

FOR ALL FALL PLANTING, WRAP TRUNK AT -2ND LOWEST BRANCH. REMOVE SPECIFIED TREE WRAP THE FOLLOWING SPRING

2"X2"X10' FIR STAKES, STAINED BLACK; 3 -PER TREE EQUALLY SPACED AROUND ROOT BALL; ALL POSTS SHALL BE PLUMB AND HAVE SAME HEIGHT ABOVE FINISH GRADE.

